



# P12

## Active 350 Watt Subwoofer

### Technical Specifications



- 12" long-throw driver with 2.5 inch / 65 mm voice coil
- 350W of high-efficiency green Class-D amplification
- Maximum output 116 dB @ 50Hz
- - 3 dB point 25 Hz
- Standby power ensures that sub is active before program material starts by calibrating to processor noise level
- Polarity Normal/Reversed switch
- Sealed-box design with heavily braced MDF cabinet
- Ultra-slim profile (8.3" / 210mm deep)
- Recessed back-panel connectors enable placement against wall
- Selectable EQ for room boundary conditions:
  - Against wall
  - In corner

#### Frequency Response

-3 dB 25 Hz

#### Maximum SPL

@ 50 Hz 116 dB

#### Components

Long-throw 12" driver with 65mm voice coil in 31 litre sealed box

#### Polarity

Switchable Normal/Reversed

#### Room Settings

Against wall

#### User selectable

In corner

#### Amplifier

350W, Digital Class D

**Connectivity** Single balanced XLR  
Single RCA input, Single RCA output

**Line Input** 40 - 80 Hz, switchable 110 - 240V

**Standby** Programmable

**Power Consumption** Standby <0.5W  
Full Power 440W

**Safety Approval** CE, FCC, CCC

**Construction** Heavily braced MDF

**Finish** White or Black matte painted finish,  
steel grille

**Included** Rubber mounting feet





**Dimensions HxWxD** 17.3" x 22.8" x 8.3" / 440 x 580 x 210 mm

**Shipping Carton** 20.5" x 27.6" x 11.8" / 520 x 700 x 300 mm

**Net weight** 35.2 Lbs / 16.0 Kg

**Shipping weight** 37.5 Lbs / 17.0 Kg

# P12

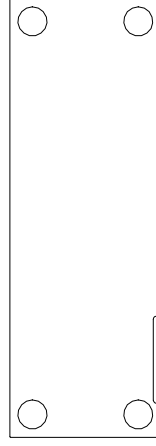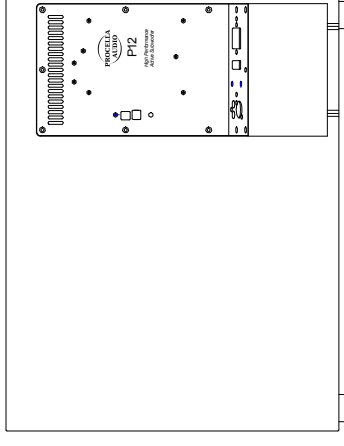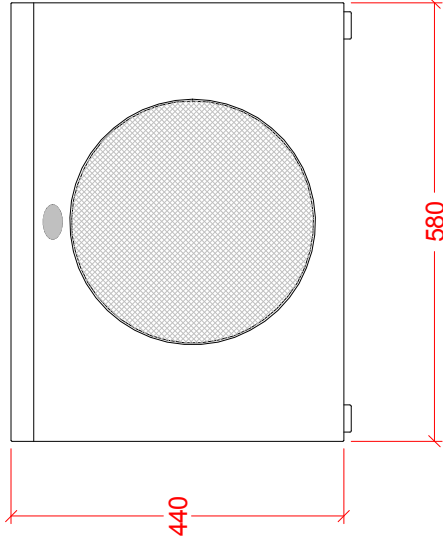

Front: 21mm MDF  
Back Sides: 15mm MDF  
Black, White Matte paint

Box volume = 30L  
Package: 660x520x280



Procella P12  
Anders Uggeberg 26/11 -13  
UPD: 7/5  
P12\_vue.CAD  
Scale 1:10 (PDF/JPG-file not to scale)