



P5

L/C/R/Surround Speaker

Technical Specifications



- Procella performance for the first time in this size and price class
- Main and surround speaker for small to mid-size rooms up to 20 feet in depth
- 1" compression driver on circular constant directivity waveguide: 80° from 2.5kHz
- 5.25" high-output pro woofer driver • Identical Voice™ timbre-matched to all Procella models
- Sealed-box design • Can be oriented horizontally or vertically • Black or White cabinet finish
- Can be used with or without optional cloth grille (magnetically attached)

Impedance 8 Ohms nominal
Phase angles less than 45 degrees

Power handling
Continuous 75 Watt
Peak 250 Watt

Sensitivity
1m/1W 91dB

Maximum SPL
free-standing 107dB continuous, 113dB peak
in wall 113dB continuous, 119dB peak

Frequency response
-3dB points 90Hz and 20kHz

Dispersion pattern
-6dB Constant directivity;
80° circular from 2.5kHz

Crossover Asymmetrical and phase aligned
2.2kHz, BSC

Components
Midrange 5.25" driver with 26mm voice coil in 5 litre sealed box

High Frequency 1" compression driver on a circular constant directivity wave guide

Connectivity Gold plated large diameter binding posts

Wall Mount Keyholes provided for both vertical and horizontal mounting

Finish White or Black semi-matte painted finish. MDF construction, removable cloth grille

Dimensions
HxWxD 12" x 7.5" x 6.7" / 304 x 190 x 170 mm






Shipping Carton
HxWxD 15.75" x 11.8" x 10.4" / 400 x 300 x 265 mm

Net weight 9.9 Lbs / 4.5Kg

Shipping weight 12.1 Lbs / 5.5Kg

Assembly Sweden; 100% QC testing

P5

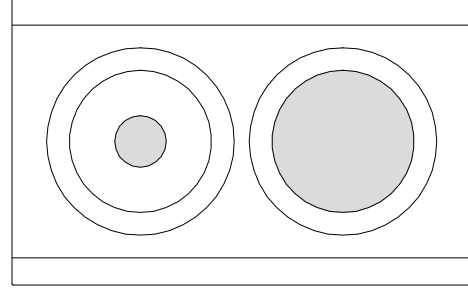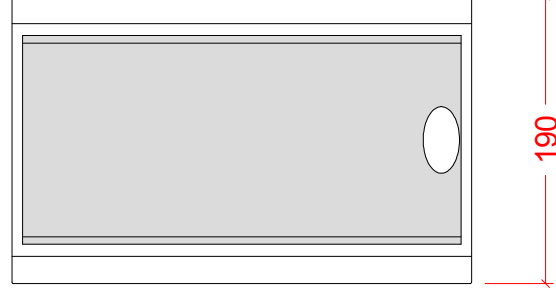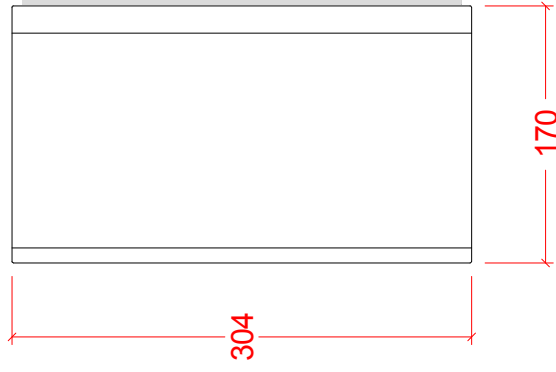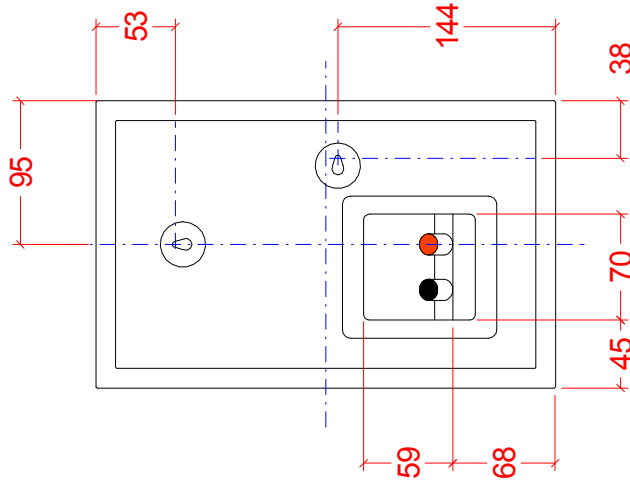

Sides, Top, Bottom: 12mm MDF
Front: 18m MDF
Black, White semi-matte paint
Weight =
Filling : 3.5L
Box volume = 5.6L
Package: 400x240x265mm



Procella P5 Dimensions
Anders Uggelberg, 6Nov -13
UPD: 26/11, 7/5
Scale 1:5 (PDF/JPG-file not to scale)
P5_VUE.CAD